


# GWX.P Series F

WEIGH PRICE LABELER SERIES "F380V"

## MAIN FEATURES

- Rates up to 50 ppm.
- Capacity: 15 kg-5 g/30 kg-10 g.
- From 2 to 3 motorized belts, tilting, double closed loop, cadence and weighing 380x800, labeling 380x1000.
- Label Applicator air jet (air blast), optional pneumatic rotary vane.
- Print mode: direct thermal (optional thermal transfer).
- Resolution 8 dots/mm, 200 dpi.
- Print speed: 200 mm/s.
- Size labels from 30x30 to 100x100 (on request other measures 4").
- Backlit graphic display Touch Screen, l x h size = 120x90 mm.
- Product guides stainless steel adjustable (optional).
- Moving horizontal and vertical printing unit.
- Machine managed by PLC.
- Brushless motors and drive boards, speed 45 m/min.
- Protection IP68 Touch Screen, IP40 transport and motors, IP65 front electrical panel.
- Operating temperature - 10 °C + 40 °C.
- Structure and carpentry of aluminum and stainless steel.
- Power supply: voltage 230 Vac +/-5%, Hz 50/60.
- Consumption 0.75 kW.
- Pneumatic connection air blast 4/5 bar consumption 60 l/min, pneumatic arm 3/4 bar 40 l/min.

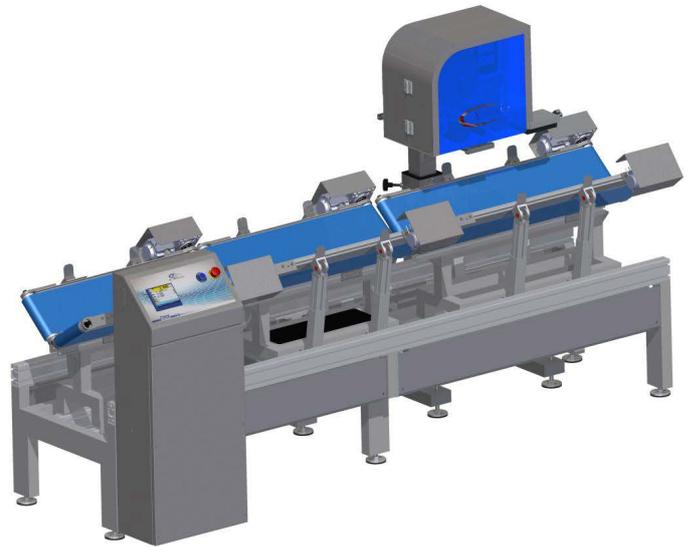

STAINLESS  
STEEL

M14



## SELECTABLE FUNCTIONS

- Cycle operation with a dedicated program; weight-pricing, only labeling or with variable setting the minimum maximum threshold of totalization.
- Calculation of the amount, price combined with the article.
- Function to weight fixed or variable.
- Management of the EAN product code and computing checkdigit control.
- Traceability of the product.
- Management of aging and expiration date.
- 4 zeroable and printable independently, partial total, general total, grand total, total for article.
- Selection of data on the display.
- Fully configurable keyboard functions.
- Reception and weight display via serial with the ability to use the received data.
- 15 texts configurable and printable ID example: code, Lot ID, operator ID, shift number, etc.
- Database of 1000 articles.
- Database of 1000 ingredients.
- Database of 200 customers.
- Database of 300 Tare.
- Function Calculator.
- Completely configurable printouts.

## I/O SECTION

- 1 RS232 serial port.
- 1 RS232/RS485 serial port.
- Labeling for totalization (optional).

## INTERFACE ON REQUEST

- USB/Ethernet/Wi-Fi/Bluetooth.



### Postadress:

TRÄDGÅRDSTEKNIK AB  
Helsingborgsvägen 578, Varalöv  
262 96 ÄNGELHOLM

Telefon : 0431-222 90  
Bg.nr : 5743-7980  
Org.nr : 556409-6120

### URL:

[www.tradgardsteknik.se](http://www.tradgardsteknik.se)  
E-postadress:  
[info@tradgardsteknik.se](mailto:info@tradgardsteknik.se)